



- Anti-static, acid-resistant and flame-retardant.
- Dirt repellent.
- Form cut sleeves with great freedom of movement.
- Pockets have flap closures to keep sparks out.
- Extra protection against the cold with an extended back.

Technical info

Two-toned. Fluorescent, with vertical and oblique transverse reflective strips. Anti-static, acid-protective and flame retardant. Dirt resistant. Protects from electric arcs and occasional welding arcs. High collar. Double stitched seams on shoulders, sleeves and at the sides. Fastening with storm flap and hidden press studs. Zipped pocket under storm flap. Extended back. Chest pocket with a zip. Chest pocket with flap and press stud. D-ring. Strap for gas alarm. Front pockets with a zip. Ergonomically shaped sleeves allow for great freedom of movement. Cuffs with elastic. Waist with internal elastic adjustment.

User



13809-216 Jacket

multi-protective
MASCOT® MULTISAFE



S	M	L	XL	2XL	3XL	4XL
---	---	---	----	-----	-----	-----

Main material/upper material


55% modacrylic/39% cotton/5% polyamid/1% carbon fibres
275 g/m²



Twill/Ripstop. Shrinkage max. 3%. According to EN ISO 20471, this product is certified to retain its properties with 50 domestic washes or 50 industrial washes. Impregnation is required after each wash to maintain EN 13034 protection.

Industrial care category B1

Certifications

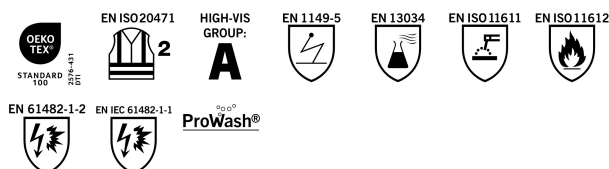

- OEKO-TEX® STANDARD 100
- EN ISO 20471 - class 2
- Hi-Vis Group A
- EN 1149-5 (tested according to EN 1149-3)
- EN 13034 (Type 6)
- EN ISO 11611 - class 1 (A1 + A2)
- EN ISO 11612 (A1, A2, B1, C1, E1, F1)
- EN 61482-1-2 APC 2 (Back part APC 1)
- EN IEC 61482-1-1 (EBT 7,7 cal/cm², ELIM 7,3 cal/cm²)
- ProWash®

Logo

Due to the unique properties of the fabric, logo printing is only available through the use of specific transfer types. As this is a safety product, we strongly recommend that MASCOT affix the logo to reduce the risk of errors. Please contact customer service for further information.

The product is certified with a maximum logo area of 0,1200m². This approved area must not be exceeded. Logos respectively on the front or back of the product, can only constitute a maximum of 50% of the total approved logo area in order to maintain the EN ISO 20471-certification. Note: The listed area is only a guide to how much space is available for logo placement. In order to maintain the product's hi-vis class according to EN ISO 20471, the instructions on logo size must

be observed.

Logo placement:

- Workwear logo. Special placement. Contact to discuss further