



- Anti-static, acid-resistant and flame-retardant.
- Dirt repellent.
- Double and triple stitched seams on leg and crotch.
- Ergonomically shaped trouser legs are constructed to follow the body's natural movements.
- Adjustable kneepad pockets so kneepads can be optimally placed on the knee.

Technical info

Two-toned. Fluorescent with reflective tape. Anti-static, acid-protective and flame retardant. Dirt resistant. Protects from electric arcs and occasional welding arcs. Double and triple stitched seams on the leg and crotch. Adjustable straps with a short and strong elastic and plastic buckles. Large bib pocket with pen opening and flap with hidden press studs. Phone pocket with zip. Adjustable waist. D-ring. Fly with zip. Ergonomically formed trouser leg. Front pockets. Back pockets with reinforcement, flap and hidden press studs. Thigh pocket with flap and hidden press studs. Phone thigh pocket. Reinforced ruler pocket with flap. Adjustable kneepad pockets with flap and top access. Co-certified together with kneepad type large in accordance with EN 14404-3.

User



13869-216 Bib & Brace with kneepad pockets

multi-protective
MASCOT® MULTISAFE



82C44	82C46	82C48	82C50	82C52	82C54	82C56
82C58	82C60	82C62	82C64	82C66	82C68	90C46
90C48	90C50	90C52	90C54	90C56	90C58	90C60
90C62	76C46	76C48	76C50	76C52	76C54	76C56

Main material/upper material


55% modacrylic/39% cotton/5% polyamid/1% carbon fibres
275 g/m²



Twill/Ripstop. Shrinkage max. 3%. According to EN ISO 20471, this product is certified to retain its properties with 50 domestic washes or 50 industrial washes. Impregnation is required after each wash to maintain EN 13034 protection.

Industrial care category B1

Certifications

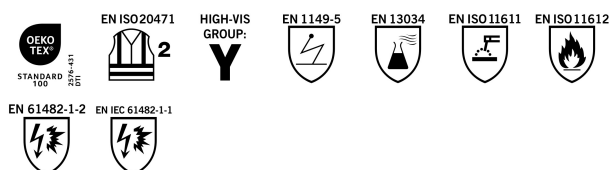

- OEKO-TEX® STANDARD 100
- EN ISO 20471 - class 2
- Hi-Vis Group Y
- EN 1149-5 (tested according to EN 1149-3)
- EN 13034 (Type 6)
- EN ISO 11611 - class 1 (A1 + A2)
- EN ISO 11612 (A1, A2, B1, C1, E1, F1)
- EN 61482-1-2 APC 1
- EN IEC 61482-1-1 (EBT 7,7 cal/cm², ELIM 7,3 cal/cm²)

Logo

Due to the unique properties of the fabric, logo printing is only available through the use of specific transfer types. As this is a safety product, we strongly recommend that MASCOT affix the logo to reduce the risk of errors. Please contact customer service for further information.

The product is certified with a maximum logo area of 0,3100m². This approved area must not be exceeded. Logos

respectively on the front or back of the product, can only constitute a maximum of 50% of the total approved logo area in order to maintain the EN ISO 20471-certification. Note: The listed area is only a guide to how much space is available for logo placement. In order to maintain the product's hi-vis class according to EN ISO 20471, the instructions on logo size must be observed.

Logo placement:

- Workwear logo. Special placement. Contact to discuss further